



## NINJA SERIES

HALF-CELL N-TYPE TOPCON

ALL BLACK GLASS-GLASS BIFACIAL MODULE

**TYPE: WSM-22DHP-220~240W**

**220-240W**

POWER OUTPUT

**22.8%**

MAX EFFICIENCY



### High module conversion efficiency

Module efficiency up to 22.8% achieved through advanced cell technology and manufacturing process



### Multi busbar technology

Superior optical utilization and current collection capacity, effectively improving product power and reliability



### Excellent low light performance

More Power output in low light conditions such as cloudy days, mornings and evenings



### Superior load-bearing capacity


Module certified to withstand 5400 Pa front side max static test load and 2400 Pa rear side max static test load

## MANAGEMENT SYSTEM AND PRODUCT CERTIFICATION

**ISO45001:** 2018/Occupational Health and Safety Management System

**ISO14001:** 2015/Environment Management System

**ISO9001:** 2015/Quality Management System

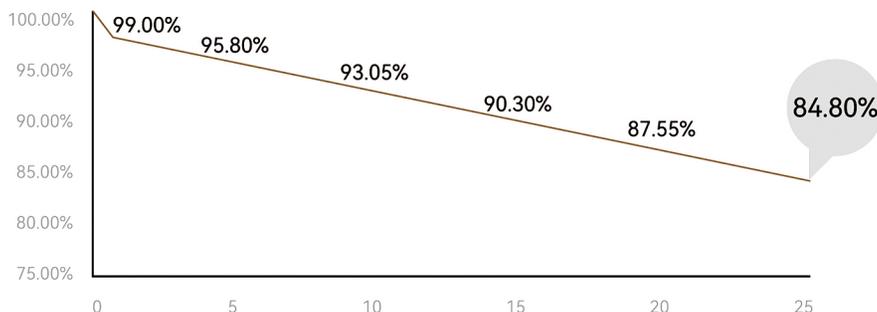

25-year  
Warranty for materials



30-year  
Warranty for linear power output

Manufactured by

**DANYANG WEISHENG ELECTRONICS CO., LTD**

Email: sales@bienesol.com

Tel: +86-511-8696 2290

Address: No.88 Qiliang North Road, Danyang City, Jiangsu, China

Website: www.bienesol.com




Authorized Distributor and Service Partner for Europe

**ME SOLAR GMBH**

Email: info@me-solar.de

Tel: +49 (0)2131 2023 806

Address: Im Taubental 17, 41468 Neuss, Germany

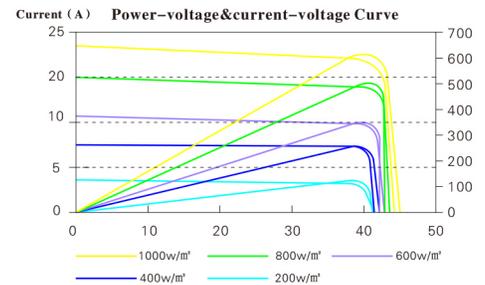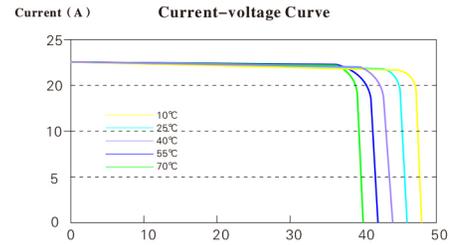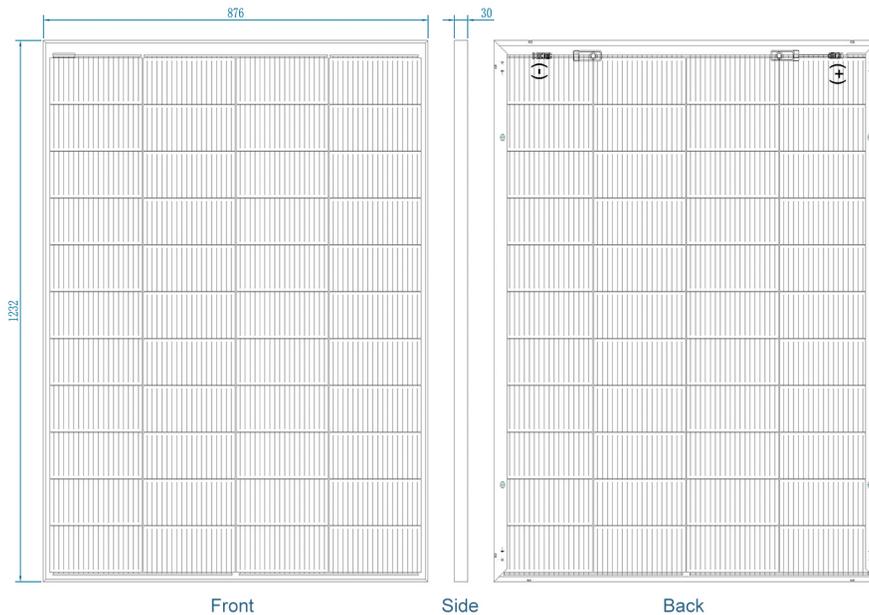

## Electrical properties

Component model	WSM-22DHP-220~240W				
Test conditions	STC/NOCT	STC/NOCT	STC/NOCT	STC/NOCT	STC/NOCT
Peak power(Pmax/W)	220/166	225/170	230/174	235/178	240/182
Open circuit voltage(Voc/V)	31.62/29.75	31.88/30	32.14/30.24	32.4/30.49	32.66/30.73
Short circuit current(Isc/A)	8.91/7.17	8.99/7.24	9.07/7.3	9.15/7.37	9.23/7.43
Peak operating woltage(Vmp/V)	26.04/24.19	26.44/24.56	26.84/24.94	27.61/25.66	28.4/26.39
Pcak operating current(Imp/A)	8.45/6.89	8.51/6.94	8.57/6.98	8.51/6.94	8.45/6.89
Component conersion efficiency(%)	20.38	20.85	21.31	21.77	22.24

Measured value under standard test conditions (atmospheric mass AM1.5, irradiance 1000W/m<sup>2</sup>, battery temperature 25°C), measurement tolerance: ±3%; NOCT: irradiance 800W/m<sup>2</sup>, ambient temperature 20°C, wind speed 1m/s.

## Product specifications

Solar cell	Mono-crystalline 210*182mm
Qty	44pcs
Dimension	1232x876x30mm
Weight	12.6kg
Glass	2.0mm+2.0mm tempered glass
Frame	Aluminum oxide alloy
JunctionBox	IP68, 2 diodes
Output cable	4.0mm <sup>2</sup> , (-) 300mm (+) 300mm in length

\*Product specifications are subject to change without notice

## Temperature characteristics

Nominal component operating temperature	43°C (± 2°C)
Peak power temperature coefficient	-0.34% /°C
Open circuit voltage temperature coefficient	-0.25% /°C
Short circuit voltage temperature coefficient	0.04% /°C

## Packaging information

Qty per box	36pcs
Qty per 40ft HQ container	1296pcs

Manufactured by  
**DANYANG WEISHENG ELECTRONICS CO., LTD**

Email: sales@bienesol.com  
Tel: +86-511-8696 2290  
Address: No.88 Qiliang North Road, Danyang City, Jiangsu, China  
Website: www.bienesol.com

Authorized Distributor and Service Partner for Europe  
**ME SOLAR GMBH**

Email: info@me-solar.de  
Tel: +49 (0)2131 2023 806  
Address: Im Taubental 17, 41468 Neuss, Germany